


## FC-M601-2

## Front chainwheel

When installing the pedals, be sure to place pedal spacers on both the left and right crank arms.


**Tightening torque :**  
50 N·m {435 in. lbs.}



## Installation of the front derailleur

### For double chainwheel

Adjust as show in the illustration and then install the front derailleur.

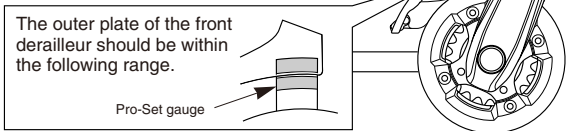

- Be sure to read the Service Instructions for the front derailleur being used together with these instructions.

# SHIMANO

**SHIMANO AMERICAN CORPORATION**  
One Holland, Irvine, California 92618, U.S.A. Phone: +1-949-951-5003

**SHIMANO EUROPE B.V.**  
Industrieweg 24, 8071 CT Nunspeet, The Netherlands Phone: +31-341-272222

**SHIMANO INC.**  
3-77 Oimatsu-cho, Sakai, Osaka 590-8577, Japan

These service instructions are printed on recycled paper.

Please note: specifications are subject to change for improvement without notice. (English)  
© Apr. 2005 by Shimano Inc. XBC SZK Printed in Japan