



E-TUBE compatibility chart

When any device which is not shown in E-TUBE compatibility chart is connected, all components don't work. Confirm the E-TUBE compatibility chart.


DI2 with BM-DN100/BT-DN110

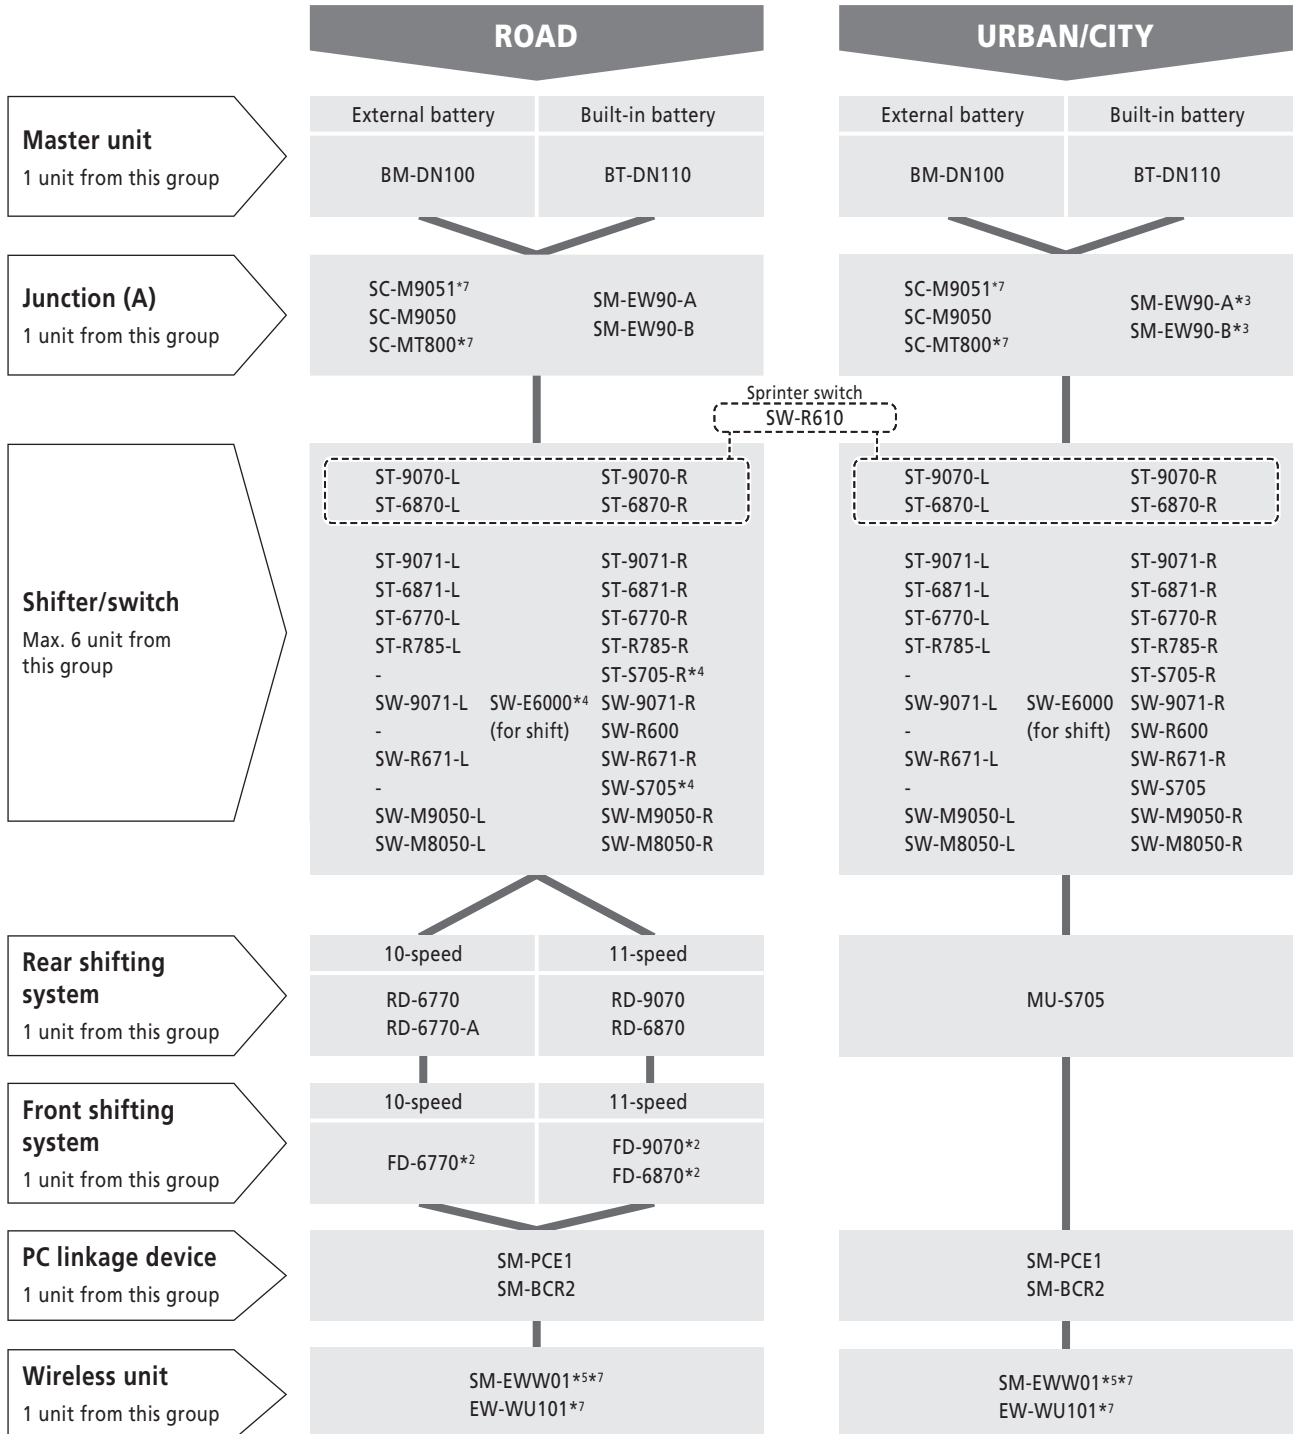


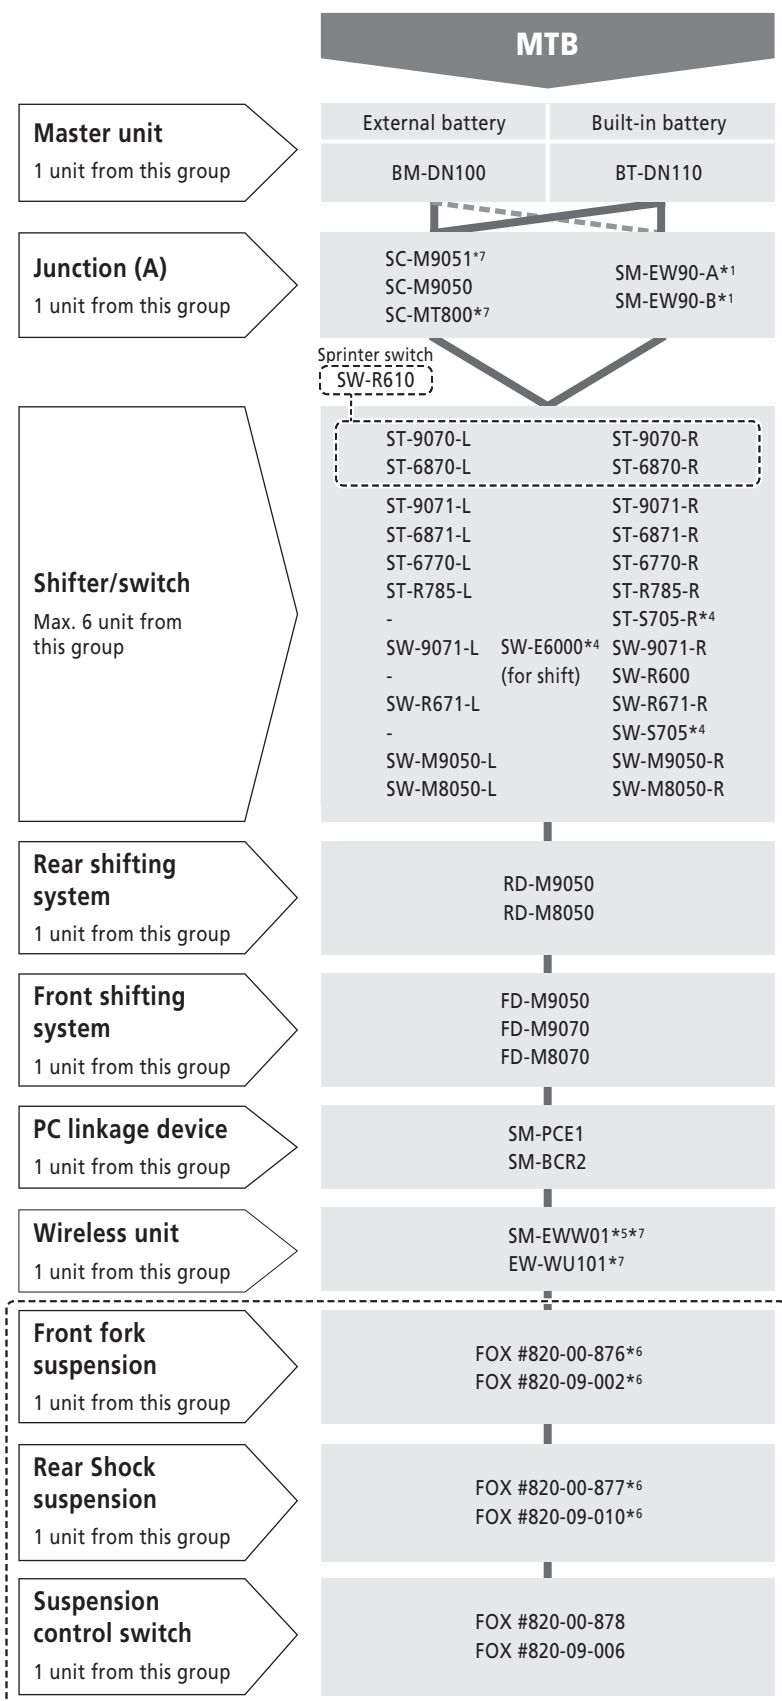

Limitation of function with BM-DN100/BT-DN110 -----

- *1 SC-M9050, SC-M9051 or SC-MT800 is required for synchronized shift.
- *2 Synchronized shift is available only in MTB category.
- *3 Shifting adjustment mode for MU-S705 is not supported. (need E-tube Project to adjust)
- *4 Only for rear shifting.
- *5 Not possible to connect to E-tube Project for tablet, as no support for Bluetooth® LE.
- *6 A designated control switch and/or the combination SW-M9050/M8050-L with SC-M9050/SC-M9051/SC-MT800 is required to operate.
- *7 The system accepts just 1 unit with wireless chip. (doesn't work if plural units with wireless chip are connected)

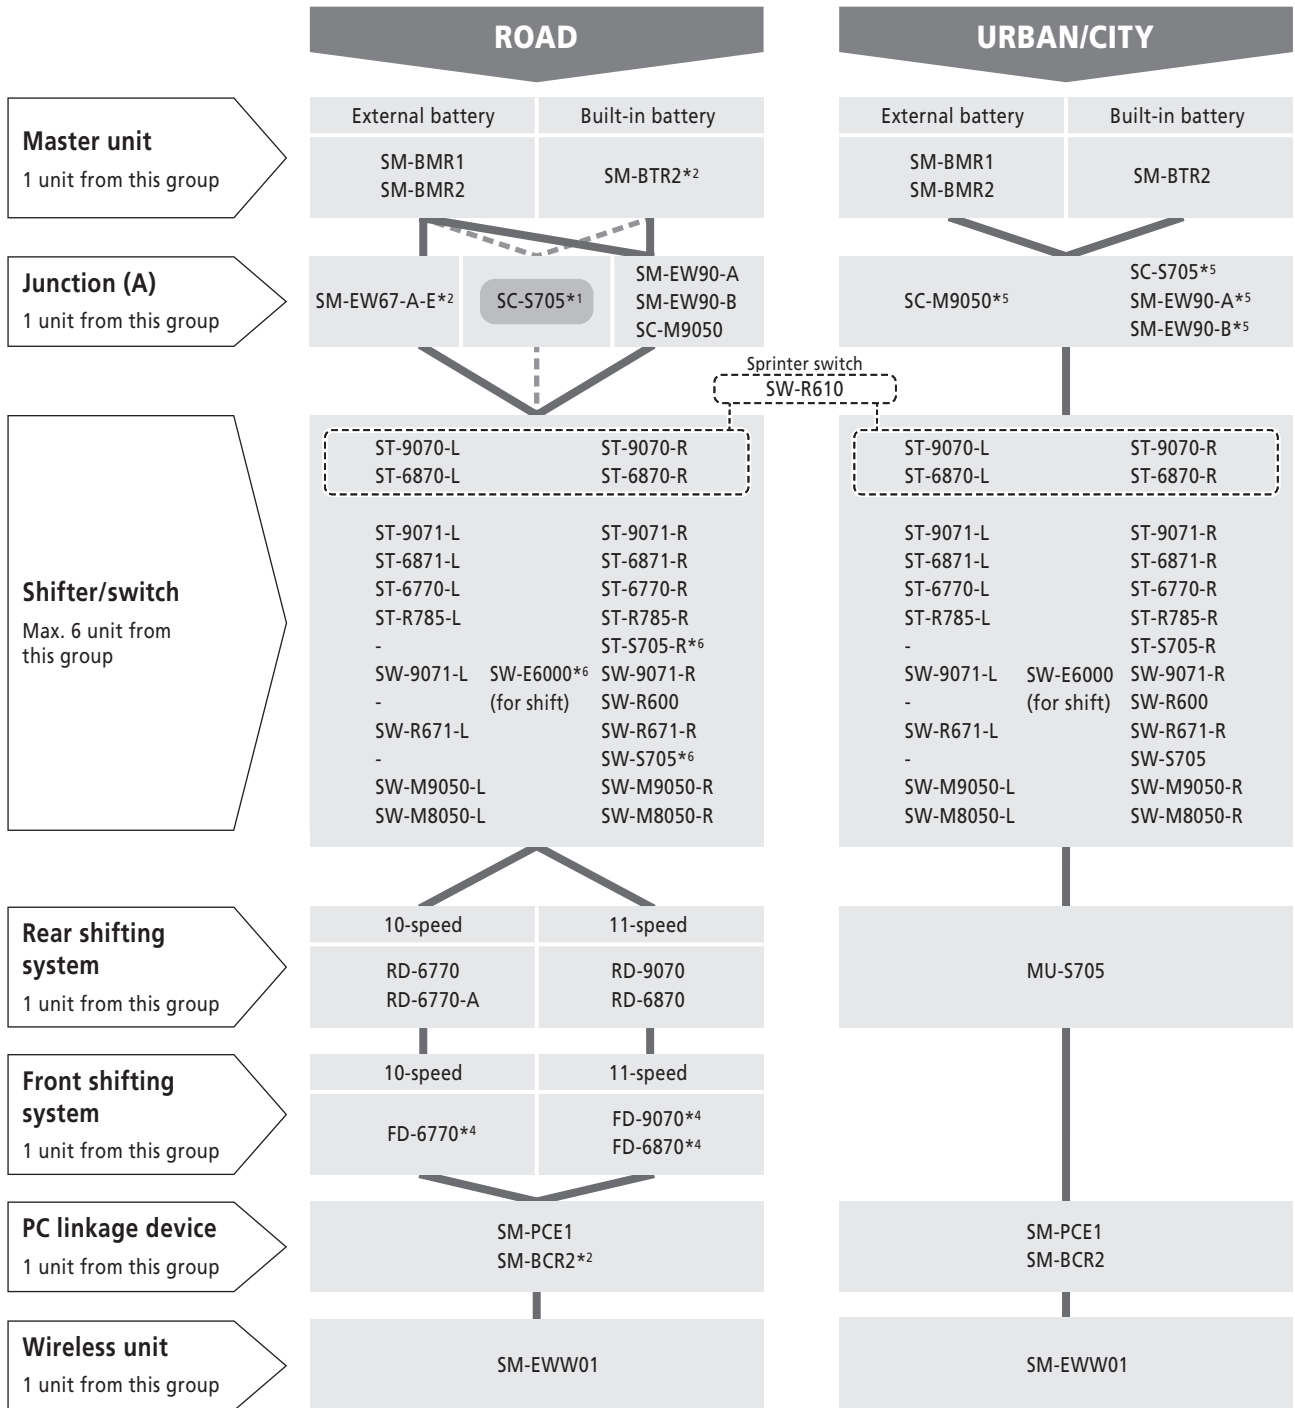

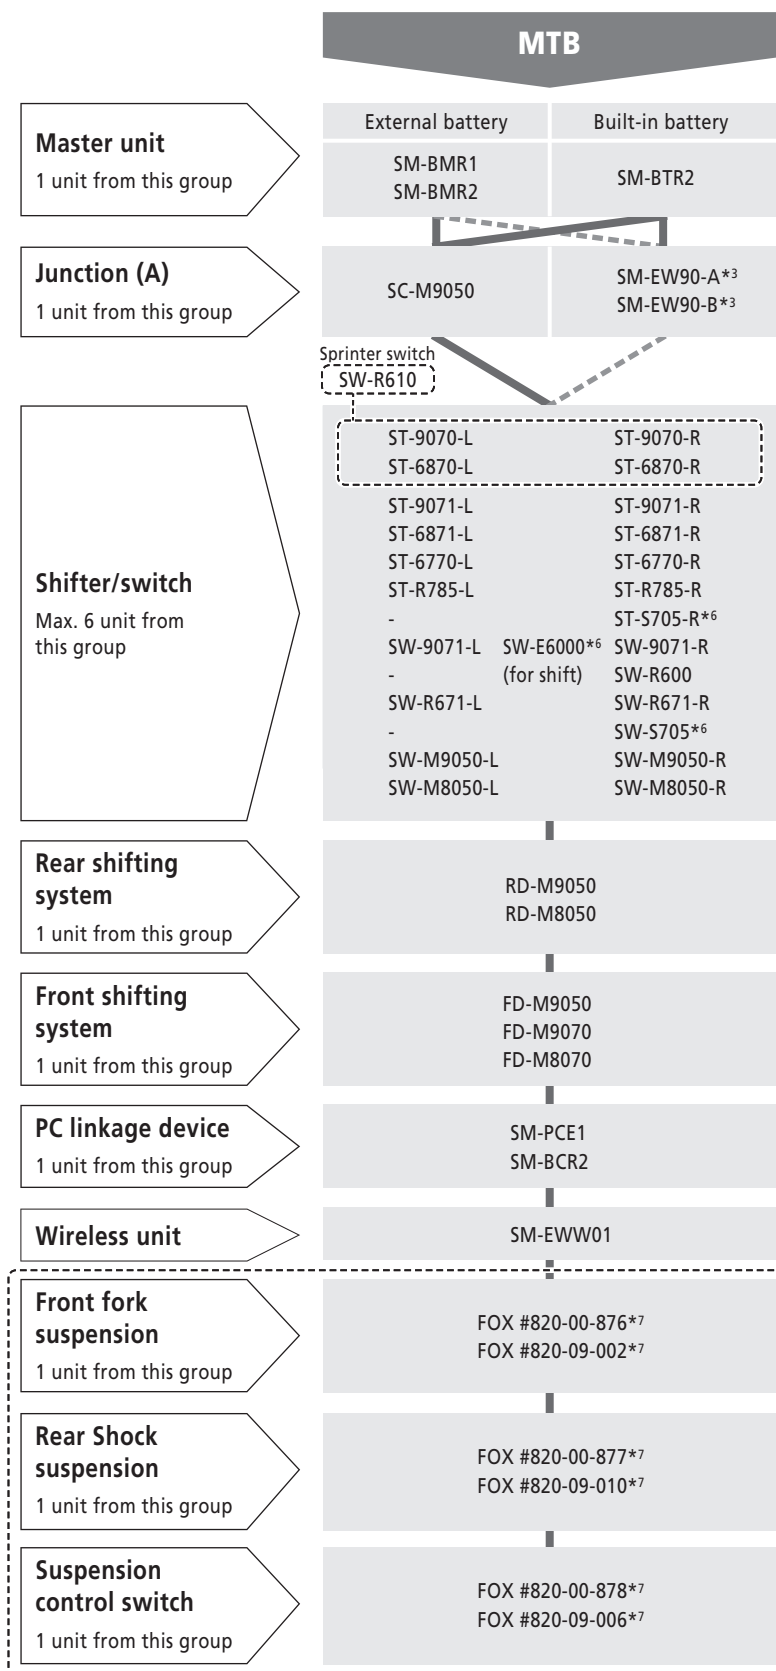

Limitation of function with SM-BMR1/SM-BMR2/SM-BTR2 -----

*1 SC-S705

- Front derailleur position will not appear on display.
- Recovery from Rear derailleur protection function is not available.
- Front / Rear derailleur adjustment mode is not available. Use E-TUBE PROJECT software.
- SC-S705 has only 1 E-TUBE port for ST / SW.
- SC-S705 may not turn on the display by front shifting switch.

*2 SM-BCR2 requires any device which has charging connector.
SM-EW67-A-E (Junction (A)) is not compatible with SM-BCR2 and SM-BTR2.

*3 SC-M9050 is required for synchronized shift.


*4 Synchronized shift is available only in MTB category.

*5 Shifting adjustment mode for MU-S705 is not supported. (need E-tube Project to adjust)

*6 Only for rear shifting

*7 A designated control switch is needed operate the suspension system.

STEPS

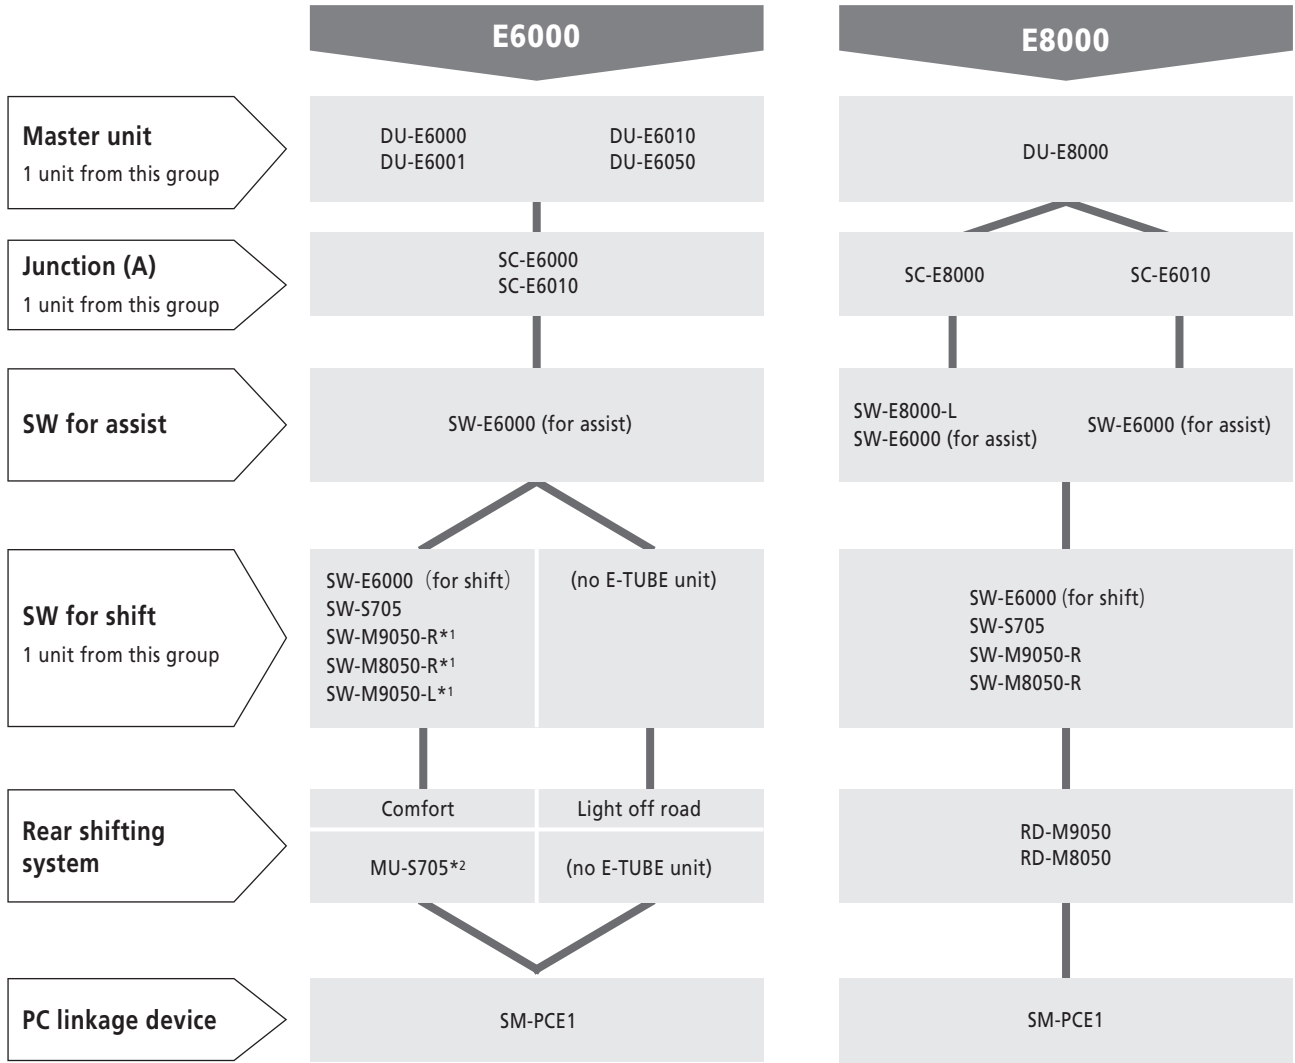

Limitation of function -----

*1 For manual shifting only.

*2 Full automatic shift is available only with 8 speed system.

Other E-BIKE system

